BASIC 1 IL RANGE 0,5÷3HP

Direct starting electromechanical control panel 1 motor with capacitor and illuminated switch

GENERAL SPECIFICATIONS

- Operating voltage 230Vac ±10% 50/60Hz
- General illuminated switch
- Running capacitor
- Thermal circuit breaker (external reset)
- Connection terminal board
- External thermoplastic box
- Cable glands
- Protection degree IP55
- Operating temperature -5/+40°C

INPUTS / OUTPUT

- Input for pressure switch or float switch

PROTECTIONS

- Maximum current protection

SINGLE-PHASE 230Vac ±10% 50/60Hz

CODE	TYPE	POWER kW	POWER Hp	THERMAL PROTECTION [A]	CAPACITOR	DIMENSIONS mm A-H	DIMENSIONS mm L-W	DIMENSIONS mm P-D	WEIGHT Kg	BOX
SA600.04/16	BASIC 1 IL 230 0,5	0,37	0,5	4	16µF	180	140	80	0,5	01
SA600.04/20	BASIC 1 IL 230 0,5	0,37	0,5	4	20µF	180	140	80	0,6	01
SA600.06/20	BASIC 1 IL 230 0,75	0,55	0,75	6	20µF	180	140	80	0,6	01
SA600.06/25	BASIC 1 IL 230 0,75	0,55	0,75	6	25µF	180	140	80	0,6	01
SA600.07/30	BASIC 1 IL 230 1	0,75	1	7	30µF	180	140	80	0,6	01
SA600.07/35	BASIC 1 IL 230 1	0,75	1	7	35µF	180	140	80	0,6	01
SA600.10/40	BASIC 1 IL 230 1,5	1,1	1,5	10	40µF	180	140	80	0,6	01
SA600.13/50	BASIC 1 IL 230 2	1,5	2	13	50µF	180	140	80	0,7	01
SA600.13/60	BASIC 1 IL 230 2	1,5	2	13	60µF	180	140	80	0,7	01
SA600.15/60	BASIC 1 IL 230 2	1,5	2	15	60µF	180	140	80	0,7	01
SA600.18/70	BASIC 1 IL 230 3	2,2	3	18	70µF	180	140	80	0,7	01
SA600.18/80	BASIC 1 IL 230 3	2,2	3	18	80µF	180	140	80	0,8	01

COMMON USE

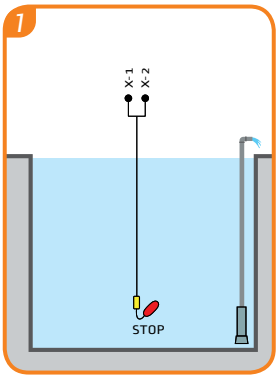

KEY COMPONENTS

Float switch for clean water